


WÖHR - Combiparker 560 1 UP - 2 DOWN  
max. Fahrzeughöhe / car-heights : 3x h=200 cm  
max. Fahrzeuglänge / car-length : 500 cm


Wenn EG = oberste Ebene : Systemhöhe 2050 mm verwenden für Fahrzeughöhe 200 cm  
if EG = top level : use system-height 2050 for this level ( cars: 200 cm)

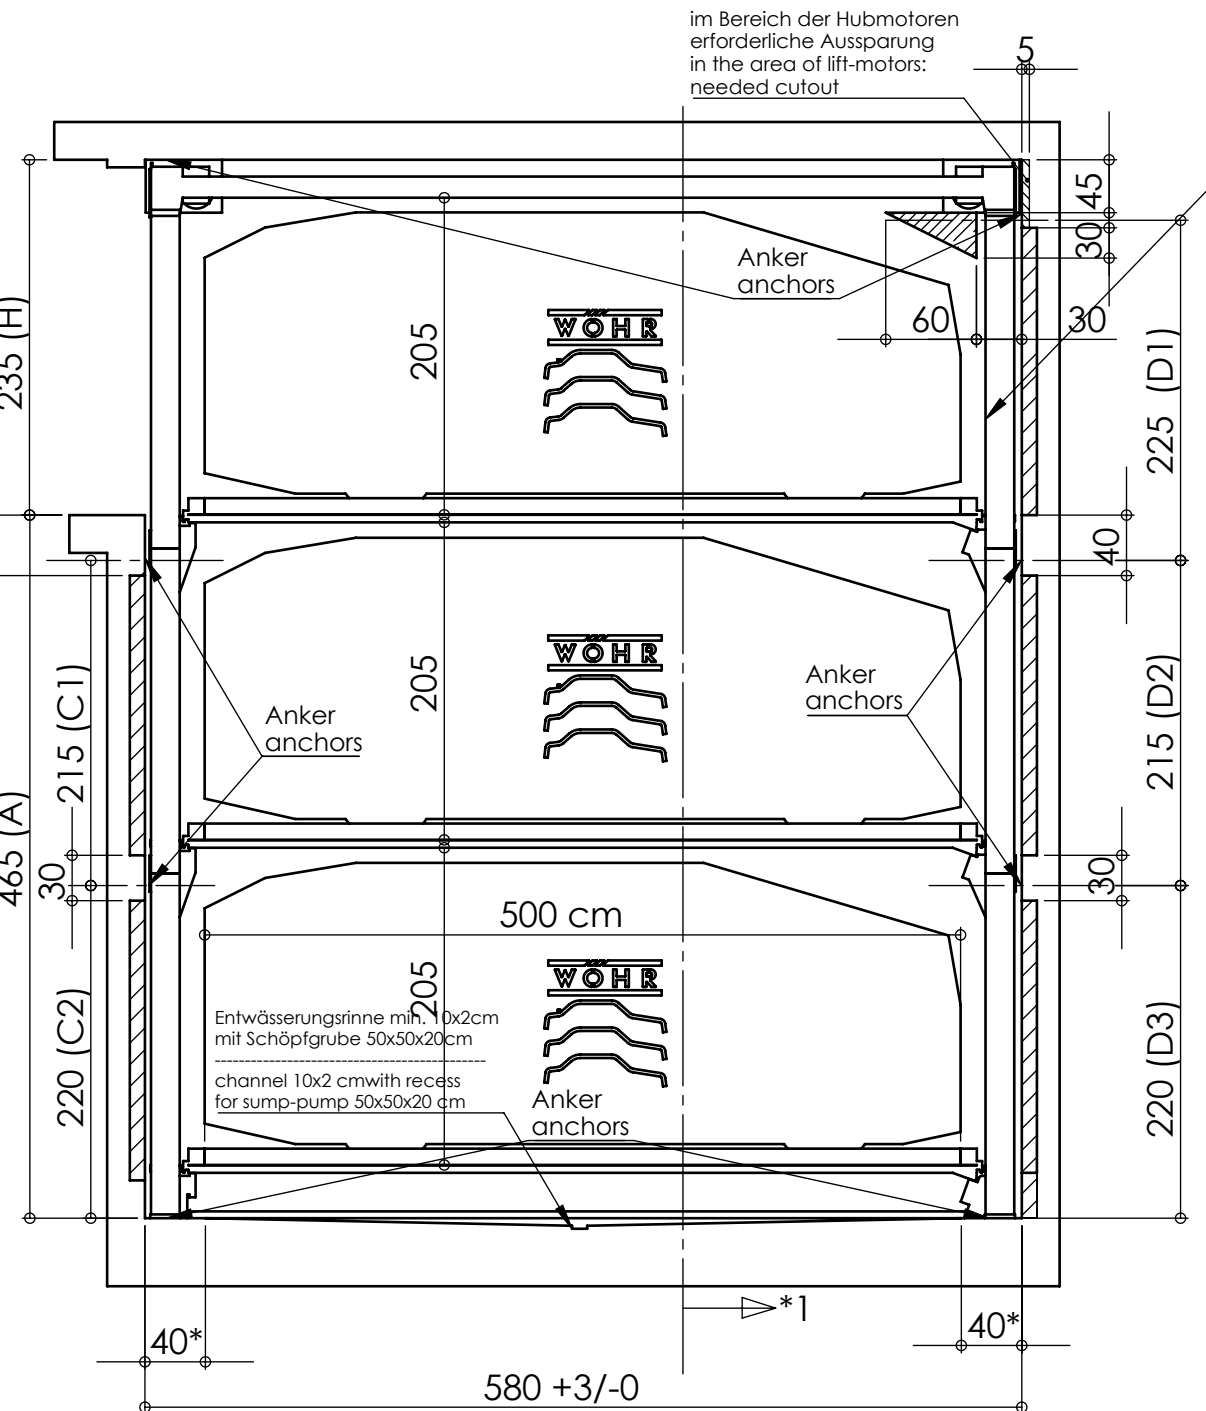

Combiparker 560 (1 up   2 down )							
Typ	175	180	185	190	195	200	205
H	235	235	235	235	235	235	240
A	415	425	435	445	455	465	475
Clear installation dimension (forces on entry side)							
C1	190	195	200	205	210	215	220
C2	195	200	205	210	215	220	225
Clear installation dimension (forces on rear wall)							
D1	225	225	225	225	225	230	235
D2	190	195	200	205	210	215	220
D3	195	200	205	210	215	220	230

WÖHR - Combiparker 560 1 UP - 3 DOWN  
max. Fahrzeughöhe / car-heights : 4x h=200 cm  
max. Fahrzeuglänge / car-length : 500 cm


Wenn EG = oberste Ebene : Systemhöhe 2050 mm verwenden für Fahrzeughöhe 200 cm  
if EG = top level : use system-height 2050 for this level ( cars: 200 cm)

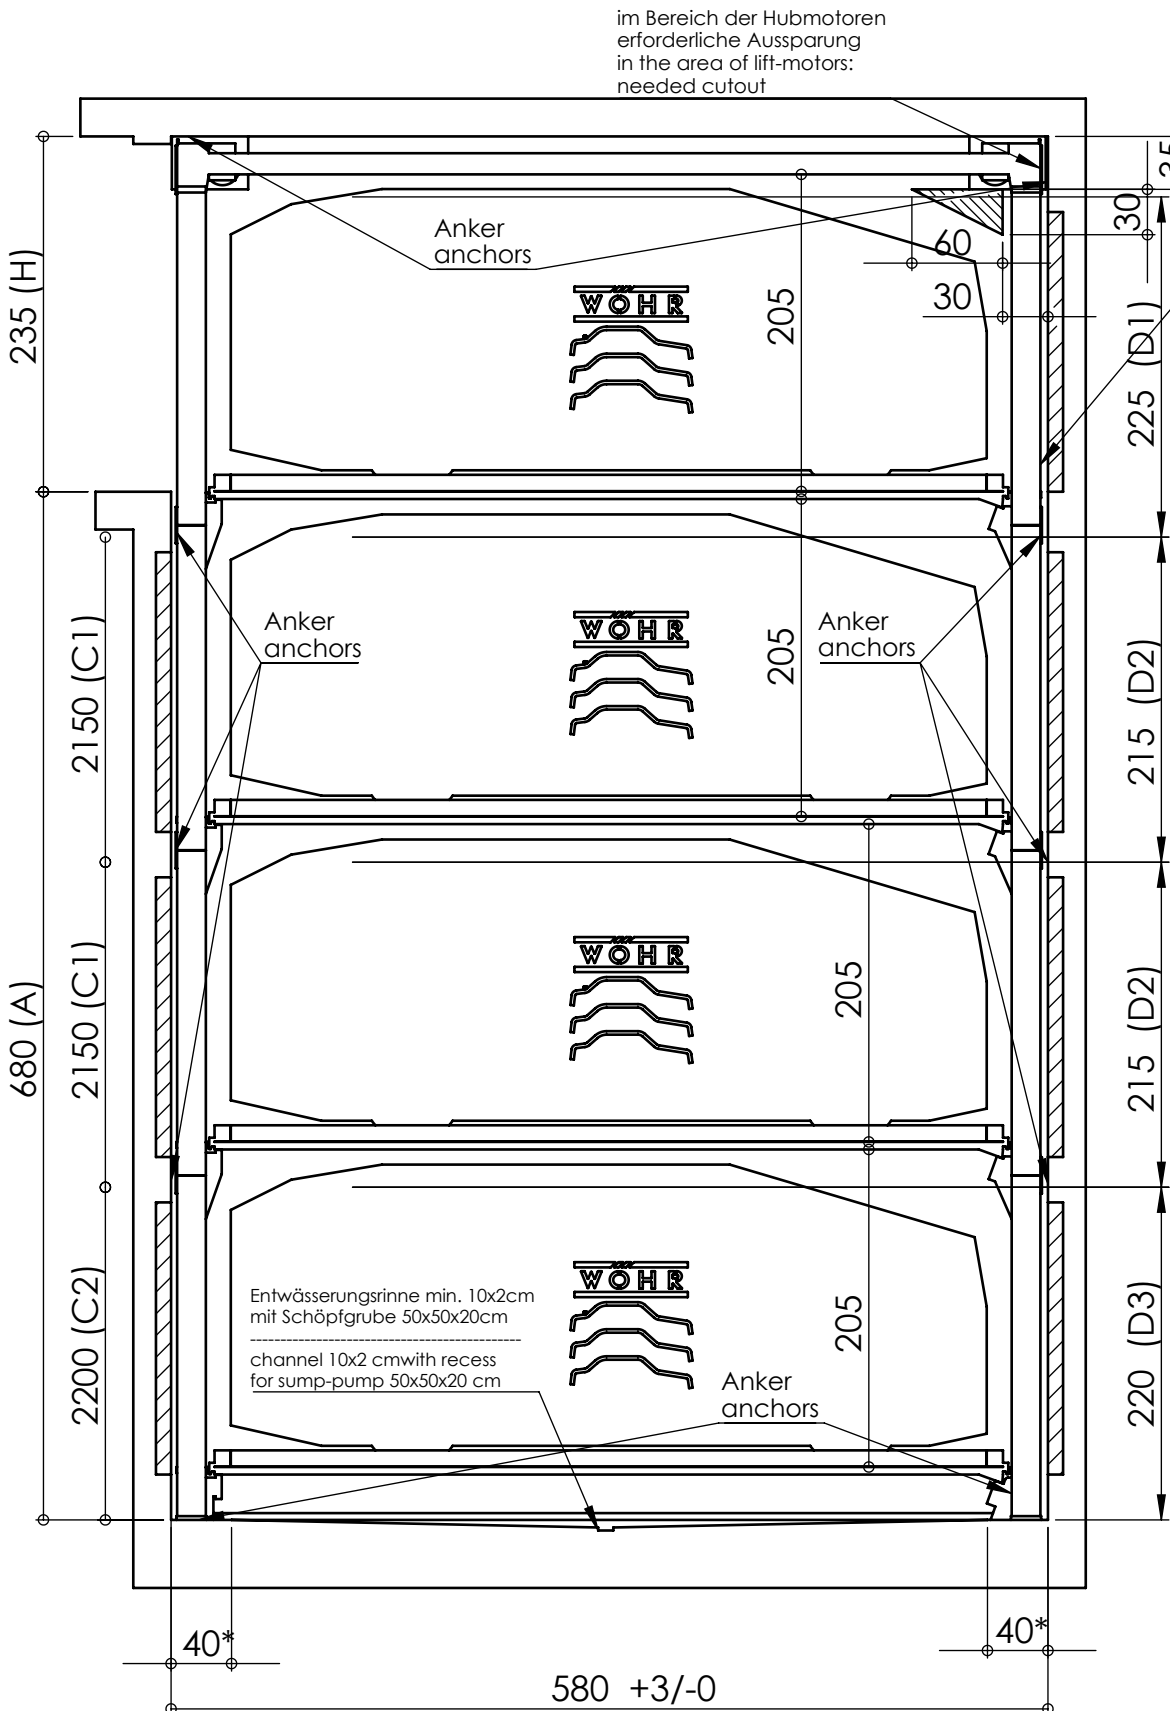

Combiparker 560 (1 up   3 down )							
Typ	175	180	185	190	195	200	205
H	235	235	235	235	235	235	240
A	605	620	635	650	665	680	695
Clear installation dimension (forces on entry side)							
C1	190	195	200	205	210	215	220
C2	195	200	205	210	215	220	225
Clear installation dimension (forces on rear wall)							
D1	225	225	225	225	225	230	235
D2	190	195	200	205	210	215	220
D3	195	200	205	210	215	220	230

WÖHR - Combiparker 560 1 UP - 4 DOWN  
max. Fahrzeughöhe / car-heights : 5x h=200 cm  
max. Fahrzeuglänge / car-length : 500 cm


Im Bereich der Hubmotoren  
erforderliche Aussparung  
in the area of lift-motors:  
needed cutout

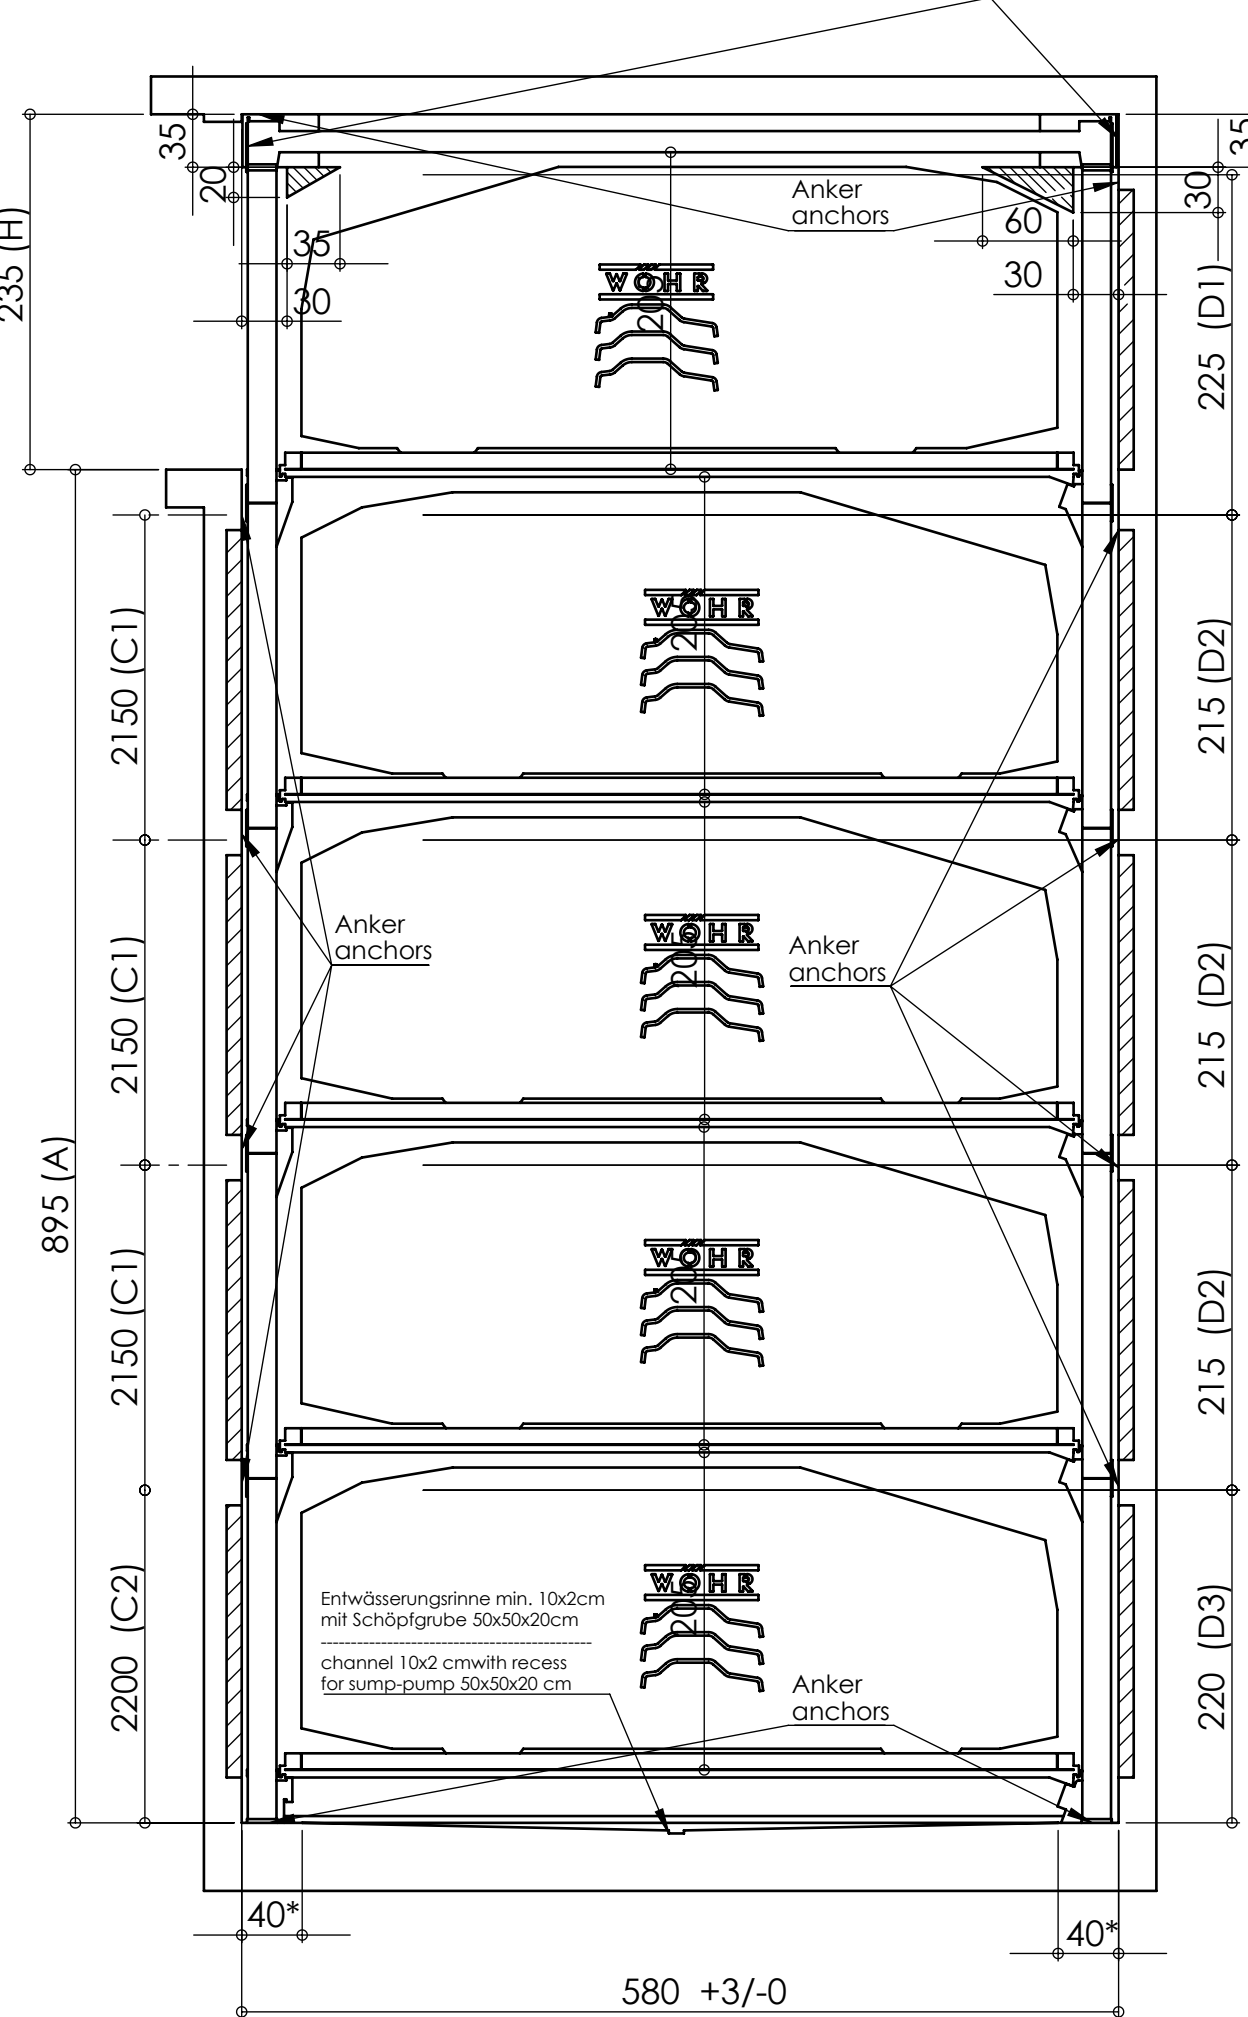

Combiparker 560 (1 up   4 down )							
Typ	175	180	185	190	195	200	205
H	235	235	235	235	235	235	240
A	795	815	835	855	875	895	915
Clear installation dimension (forces on entry side)							
C1	190	195	200	205	210	215	220
C2	195	200	205	210	215	220	225
Clear installation dimension (forces on rear wall)							
D1	225	225	225	225	225	230	235
D2	190	195	200	205	210	215	220
D3	195	200	205	210	215	220	230

WÖHR - Combiparker 560 2 UP - 2 DOWN  
max. Fahrzeughöhe / car-heights : 4x h=200 cm  
max. Fahrzeuglänge / car-length : 500 cm


Im Bereich der Hubmotoren  
erforderliche Aussparung  
in the area of lift-motors:  
needed cutout

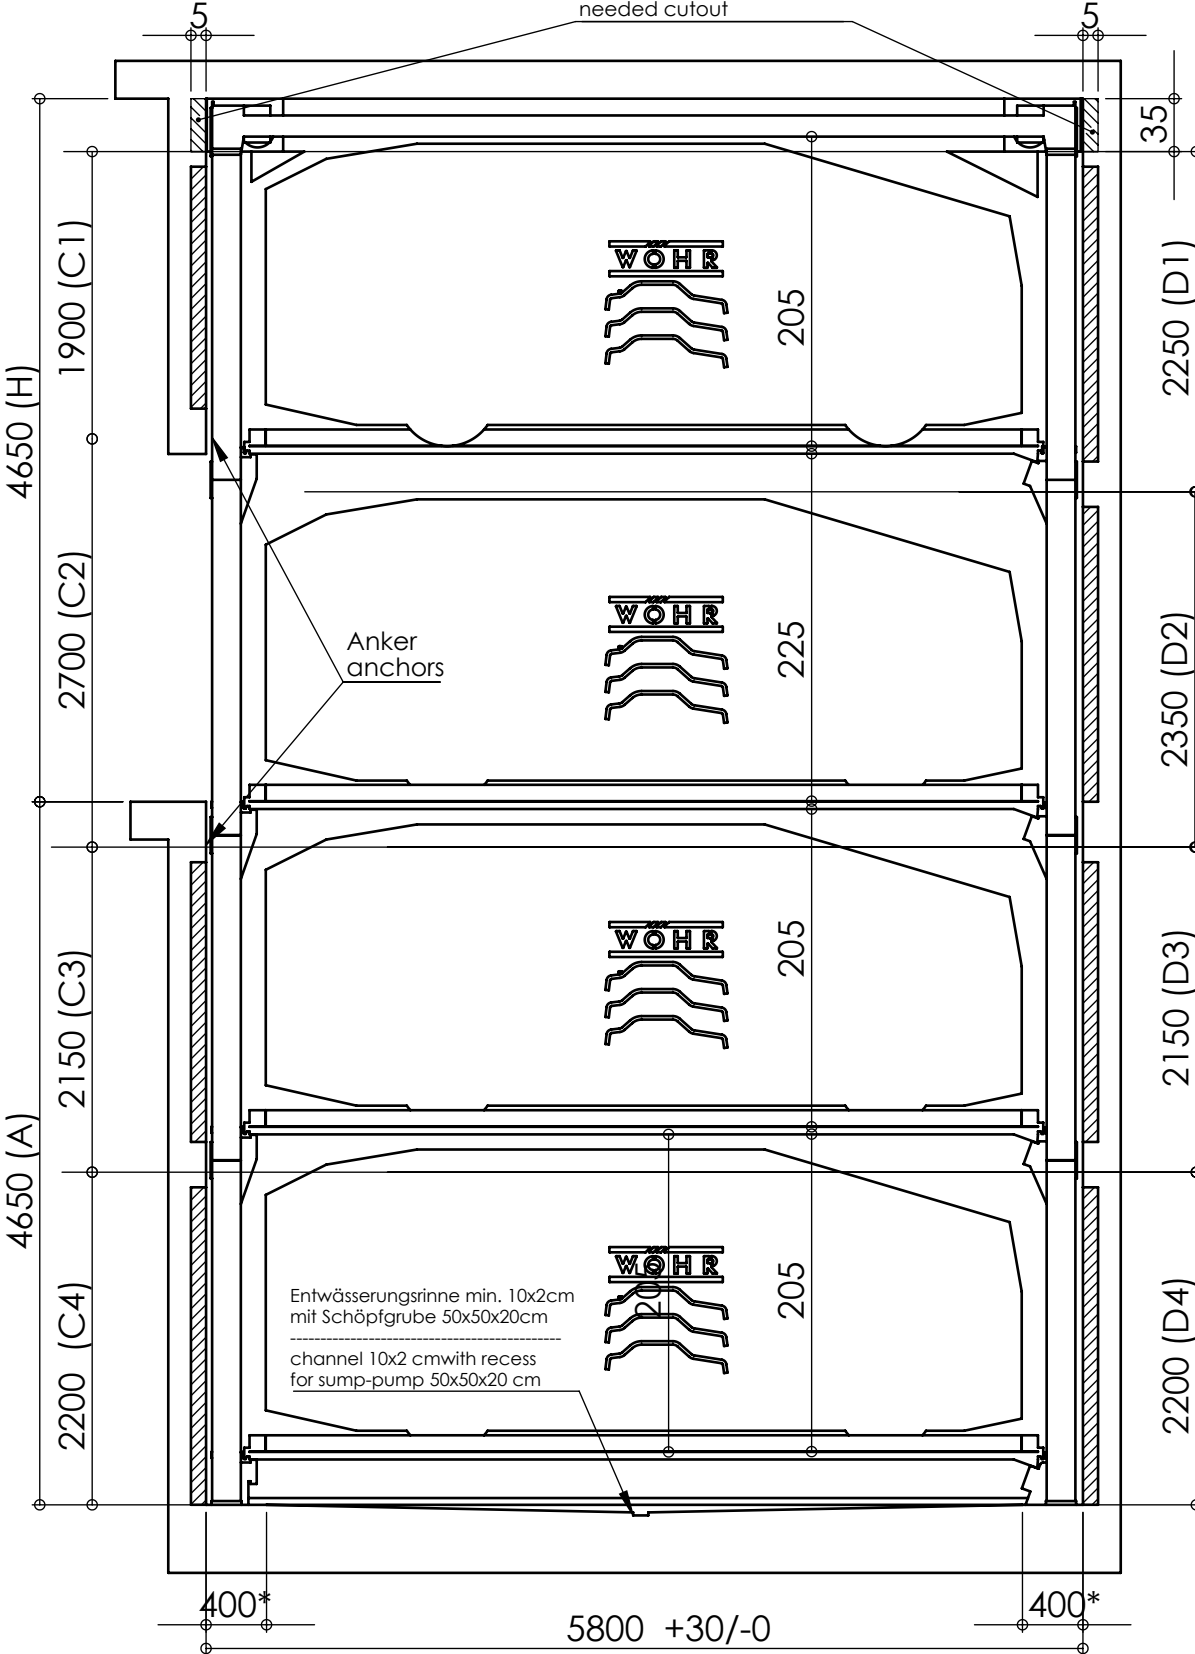

Combiparker 560 (2up   2down )							
Typ	175	180	185	190	195	200	205
H	415	425	435	445	455	465	475
A	415	425	435	445	455	465	475
Clear installation dimension (forces on entry side)							
C1	140	150	160	170	180	190	200
C2	270	270	270	270	270	270	280
C3	190	195	200	205	210	215	220
C4	195	200	205	210	215	220	230
Clear installation dimension (forces on rear wall)							
D1	200	205	210	215	220	225	230
D2	210	215	220	225	230	235	240
D3	190	195	200	205	210	215	220


WÖHR - Combiparker 560 2 UP - 3 DOWN  
max. Fahrzeughöhe / car-heights : 5x h=200 cm  
max. Fahrzeuglänge / car-length : 500 cm

Im Bereich der Hubmotoren  
erforderliche Aussparung  
in the area of lift-motors:  
needed cutout

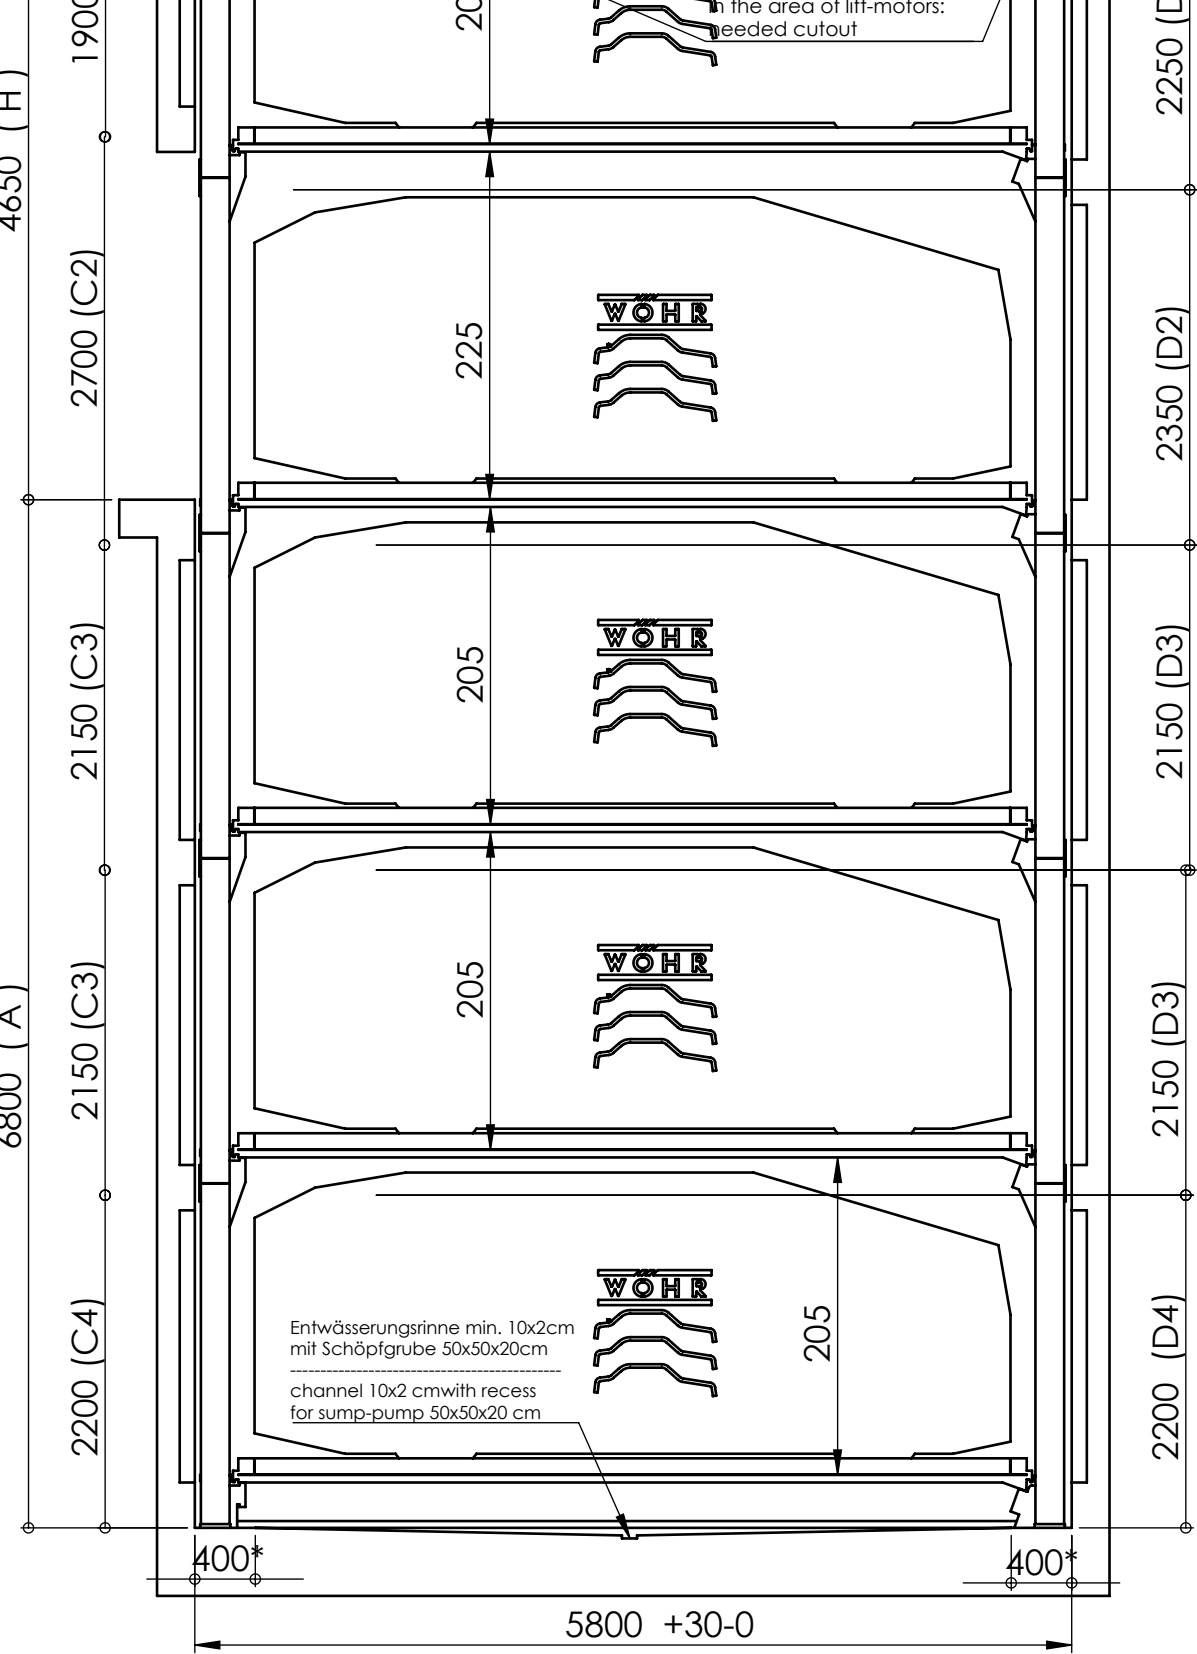


Combiparker 560 (2up   3down )							
Typ	175	180	185	190	195	200	205
H	415	425	435	445	455	465	475
A	605	620	635	650	665	680	695
Clear installation dimension (forces on entry side)							
C1	140	150	160	170	180	190	200
C2	270	270	270	270	270	270	280
C3	190	195	200	205	210	215	220
C4	195	200	205	210	215	220	230
Clear installation dimension (forces on rear wall)							
D1	200	205	210	215	220	225	230
D2	210	215	220	225	230	235	240
D3	190	195	200	205	210	215	220
D4	195	200	205	210	215	220	230

WÖHR - Combiparker 560 3 UP - 1 DOWN  
max. Fahrzeughöhe / car-heights : 4x h=200 cm  
max. Fahrzeuglänge / car-length : 500 cm

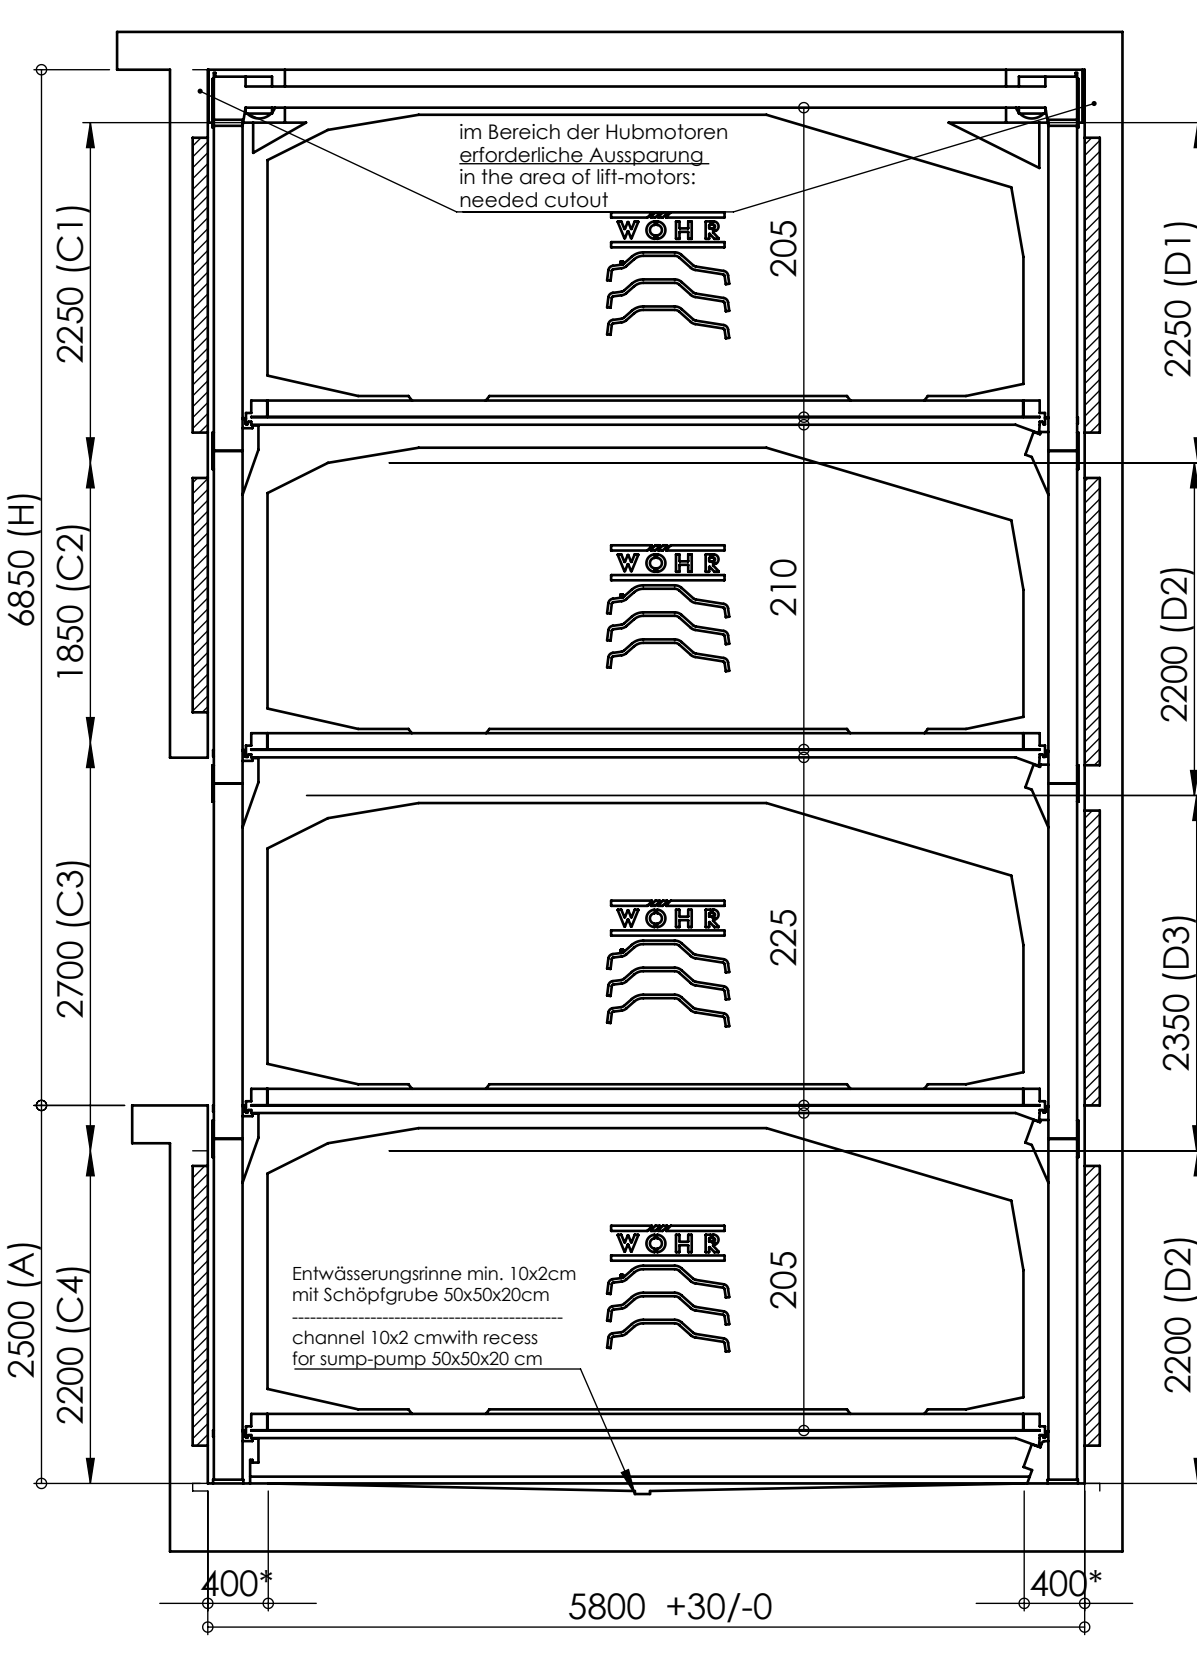


Combiparker 560 (3up   1down )							
Typ	175	180	185	190	195	200	205
H	610	625	640	655	670	685	700
A	225	230	235	240	245	250	255
Clear installation dimension (forces on entry side)							
C1	200	205	210	215	220	225	230
C2	135	145	155	165	175	185	195
C3	270	270	270	270	270	270	280
C4	195	200	205	210	215	220	230
Clear installation dimension (forces on rear wall)							
D1	200	205	210	215	220	225	230
D2	195	200	205	210	215	220	225
D3	210	215	220	225	230	235	240

WÖHR - Combiparker 560 3 UP - 2 DOWN  
max. Fahrzeughöhe / car-heights : 5x h=200 cm  
max. Fahrzeuglänge / car-length : 500 cm

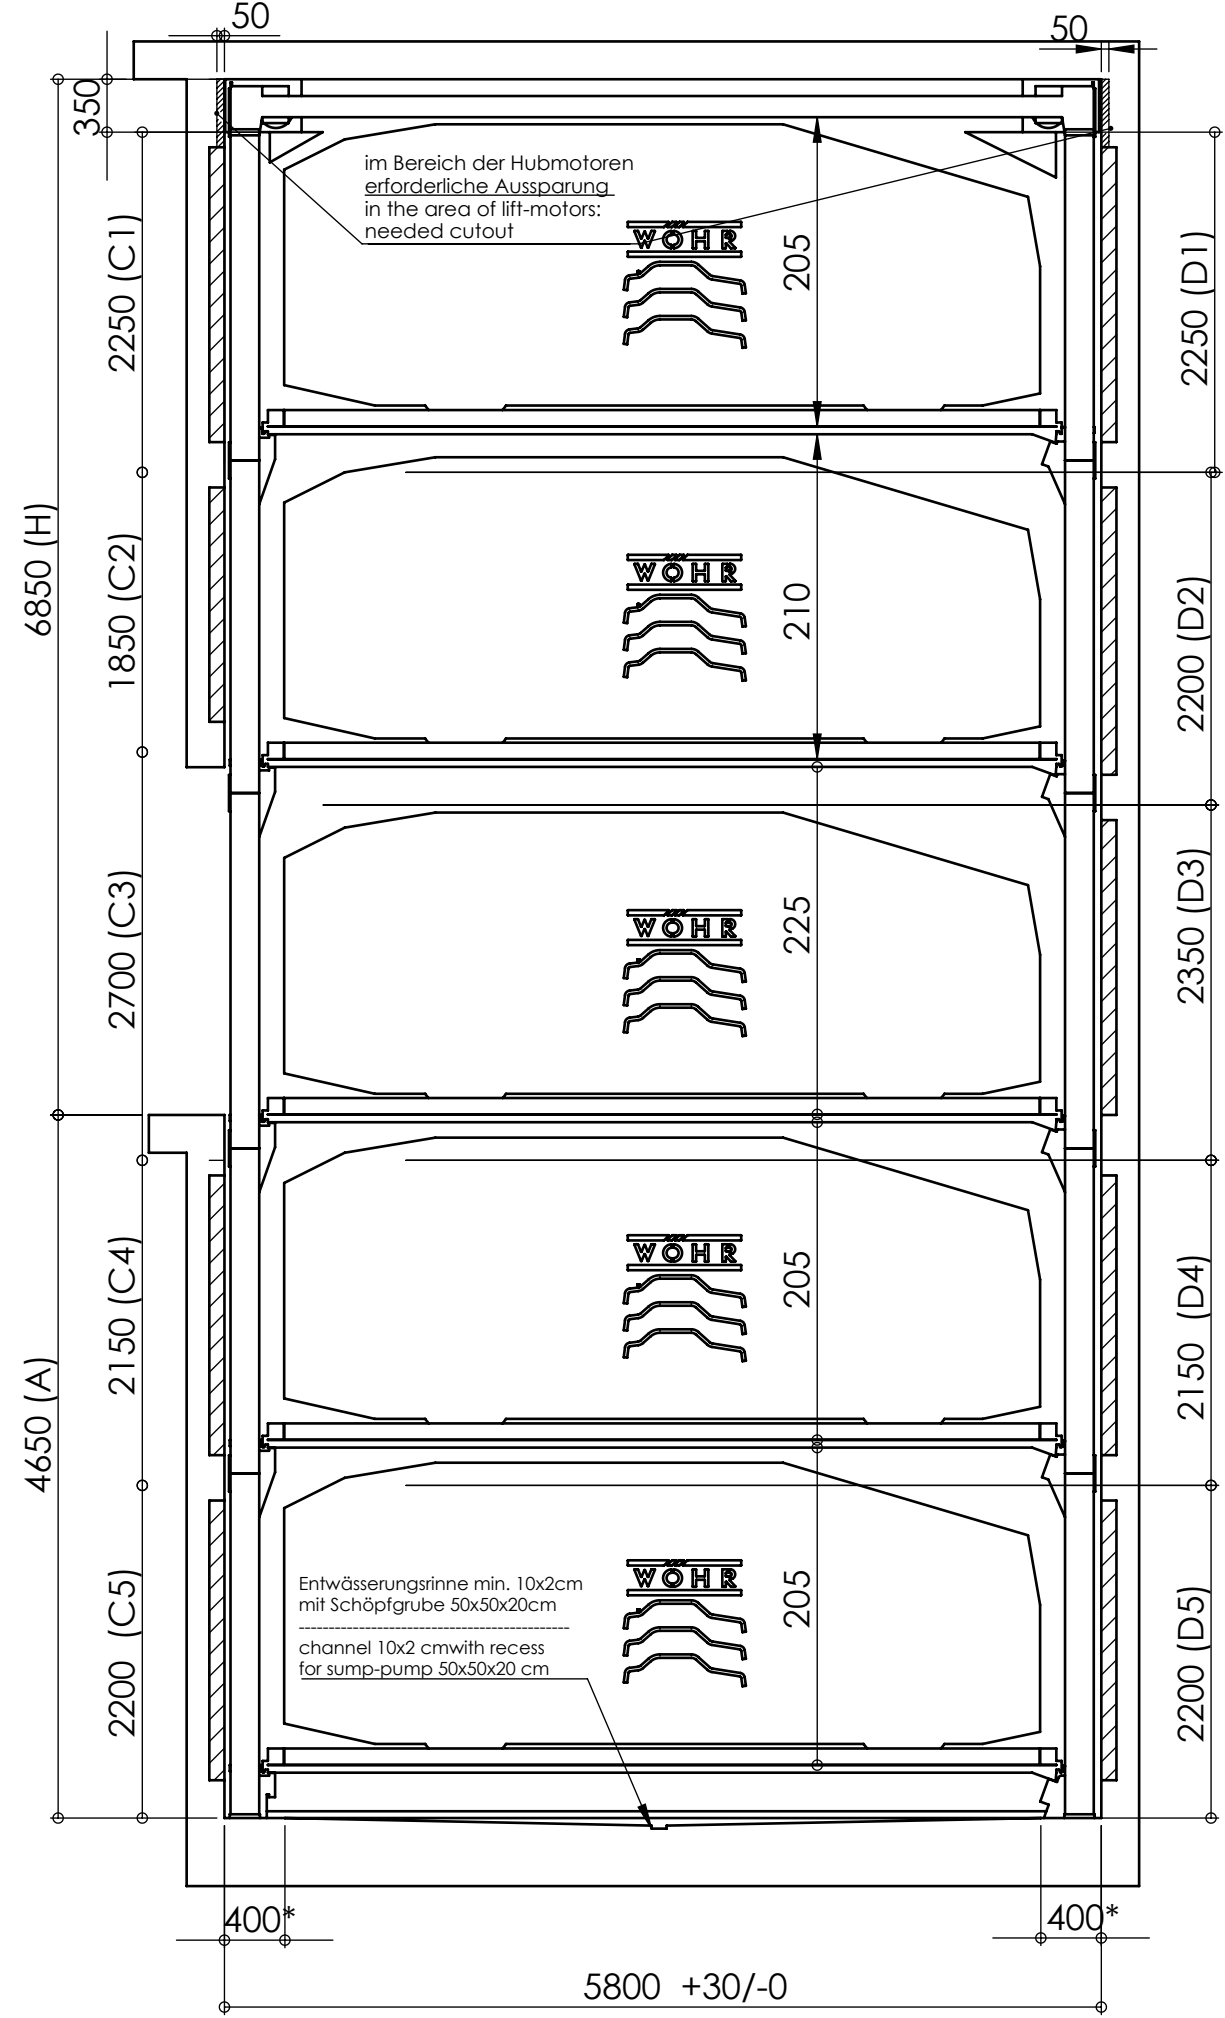


Combiparker 560 (3up   2down )							
Typ	175	180	185	190	195	200	205
H	610	625	640	655	670	685	700
A	415	425	435	445	455	465	475
Clear installation dimension (forces on entry side)							
C1	200	205	210	215	220	225	230
C2	135	145	155	165	175	185	195
C3	270	270	270	270	270	270	280
C4	195	200	205	210	215	220	230
Clear installation dimension (forces on rear wall)							
D1	200	205	210	215	220	225	230
D2	195	200	205	210	215	220	225
D3	210	215	220	225	230	235	240
D4	190	195	200	205	210	215	220

WÖHR - Combiparker 560 4 UP - 1 DOWN  
max. Fahrzeughöhe / car-heights : 4x h=200 cm  
max. Fahrzeuglänge / car-length : 500 cm

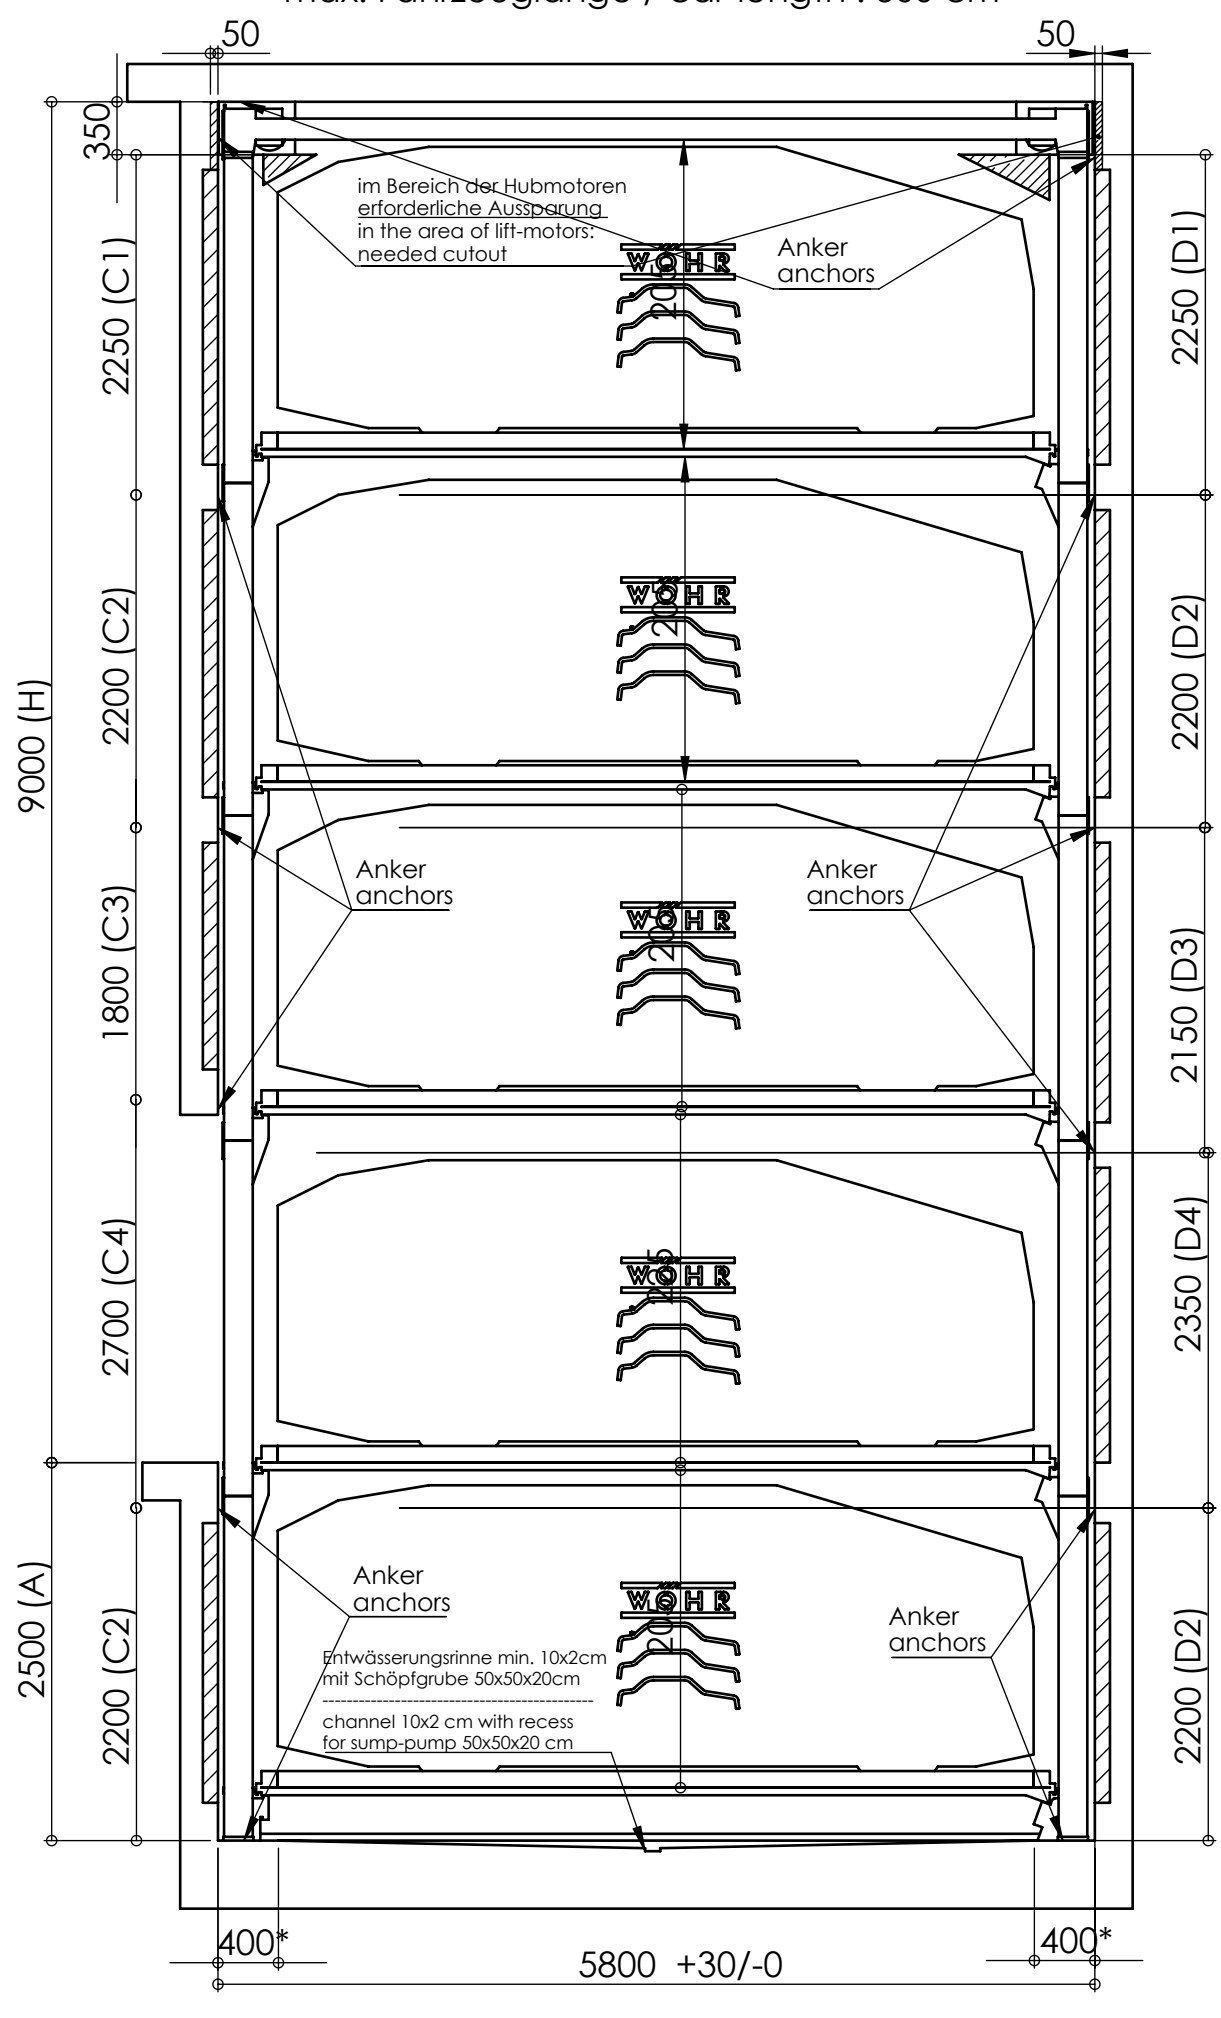


Combiparker 560 (4up   1down )							
Typ	175	180	185	190	195	200	205
H	800	820	840	860	880	900	920
A	225	230	235	240	245	250	255
Clear installation dimension (forces on entry side)							
C1	200	205	210	215	220	225	230
C2	195	200	205	210	215	220	225
C3	130	140	150	160	170	180	190
C4	270	270	270	270	270	270	280
Clear installation dimension (forces on rear wall)							
D1	200	205	210	215	220	225	230
D2	195	200	205	210	215	220	225
D3	190	195	200	205	210	215	220
D4	210	215	220	225	230	235	240

WÖHR - Combiparker 560 5 UP  
max. Fahrzeughöhe / car-heights : 5 x h=200 cm  
max. Fahrzeuglänge / car-length : 500 cm

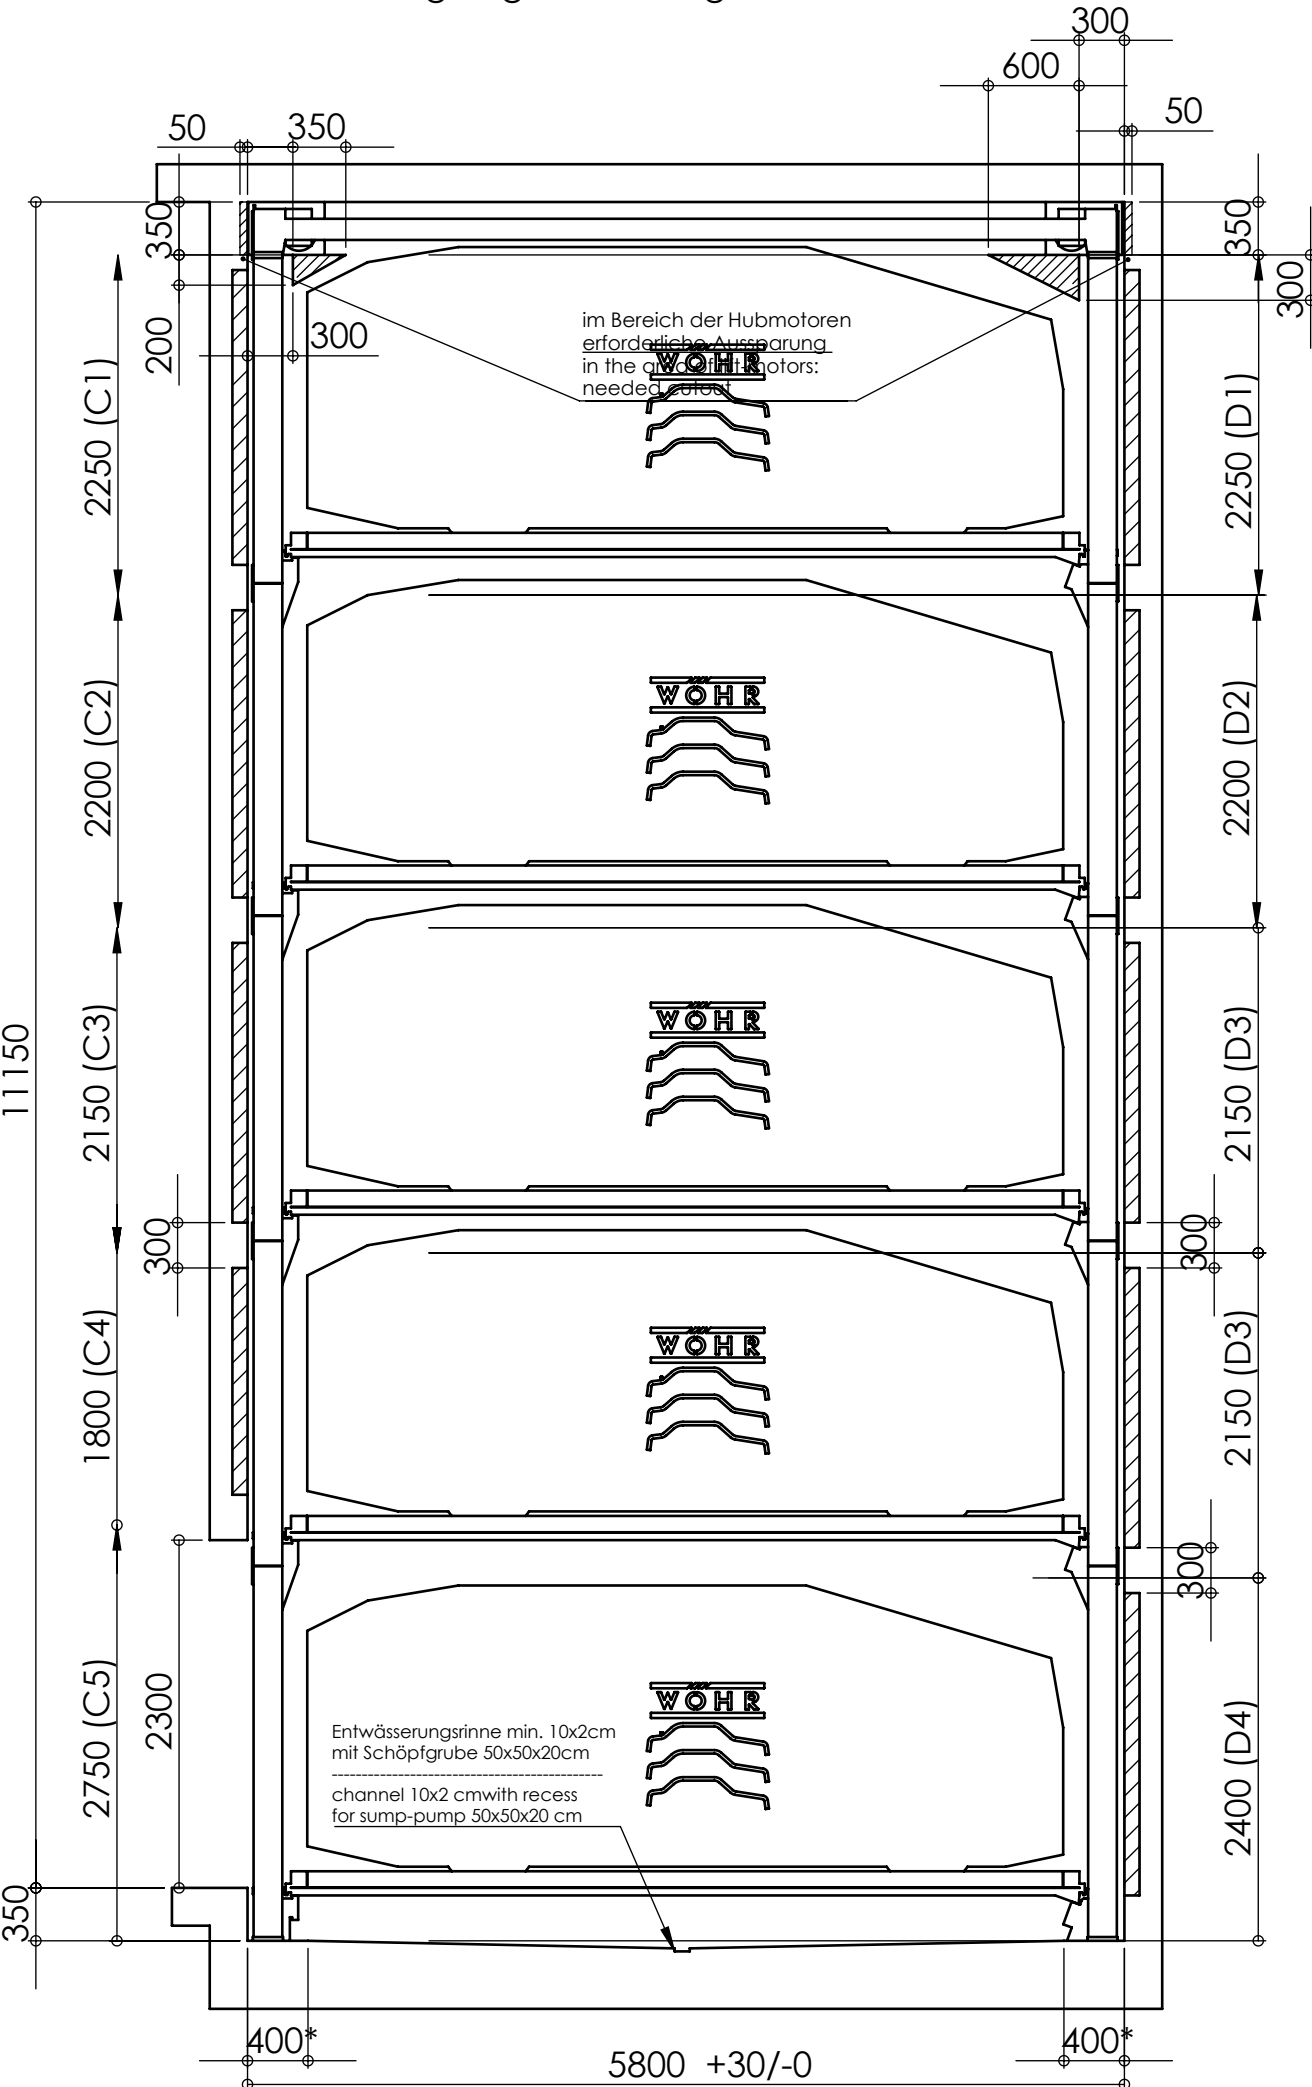

Combiparker 560 (5 up )							
Typ	175	180	185	190	195	200	205
H	990	1015	1040	1065	1090	1115	1140
A	225	230	235	240	245	250	255
Clear installation dimension (forces on entry side)							
C1	200	205	210	215	220	225	230
C2	195	200	205	210	215	220	225
C3	130	140	150	160	170	180	190
C4	275	275	275	275	275	275	280
Clear installation dimension (forces on rear wall)							
D1	200	205	210	215	220	225	230
D2	195	200	205	210	215	220	225
D3	190	195	200	205	210	215	220
D4	215	220	225	230	235	240	245

WÖHR - Combiparker 560 4 UP  
max. Fahrzeughöhe / car-heights : 4 x h=200 cm  
max. Fahrzeuglänge / car-length : 500 cm

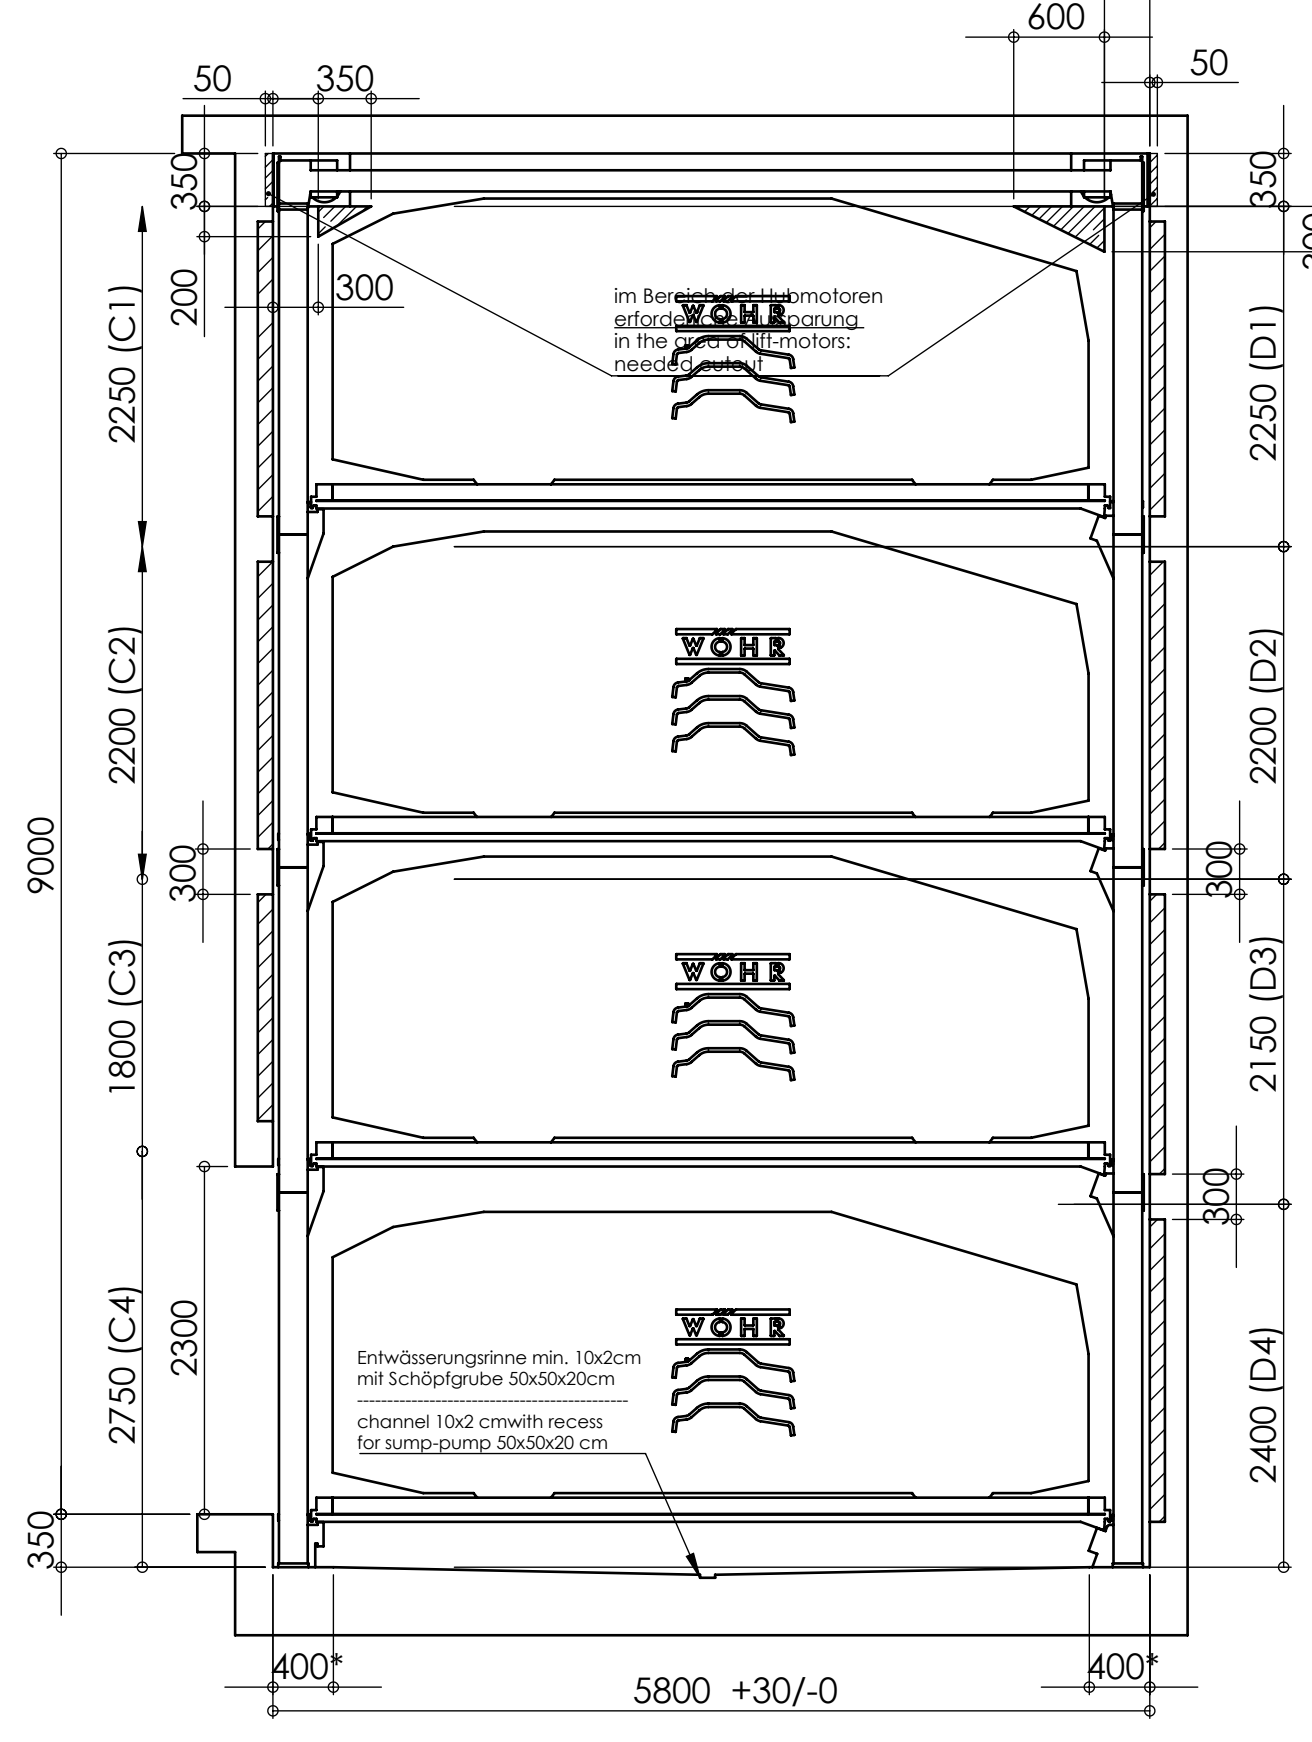

Combiparker 560 (4 up )							
Typ	175	180	185	190	195	200	205
H	800	820	840	860	880	900	920
A	225	230	235	240	245	250	255
Clear installation dimension (forces on entry side)							
C1	200	205	210	215	220	225	230
C2	195	200	205	210	215	220	225
C3	130	140	150	160	170	180	190
C4	275	275	275	275	275	275	280
Clear installation dimension (forces on rear wall)							
D1	200	205	210	215	220	225	230
D2	195	200	205	210	215	220	225
D3	190	195	200	205	210	215	220
D4	215	220	225	230	235	240	245

WÖHR - Combiparker 560 3 UP  
max. Fahrzeughöhe / car-heights : 3 x h=200 cm  
max. Fahrzeuglänge / car-length : 500 cm

