



Product Information

EV charging for Automatic Parking Systems

- Level Parker 570/590
- Parksafe 580/582/583
- Multiparker 710/720/730/740



Product Overview

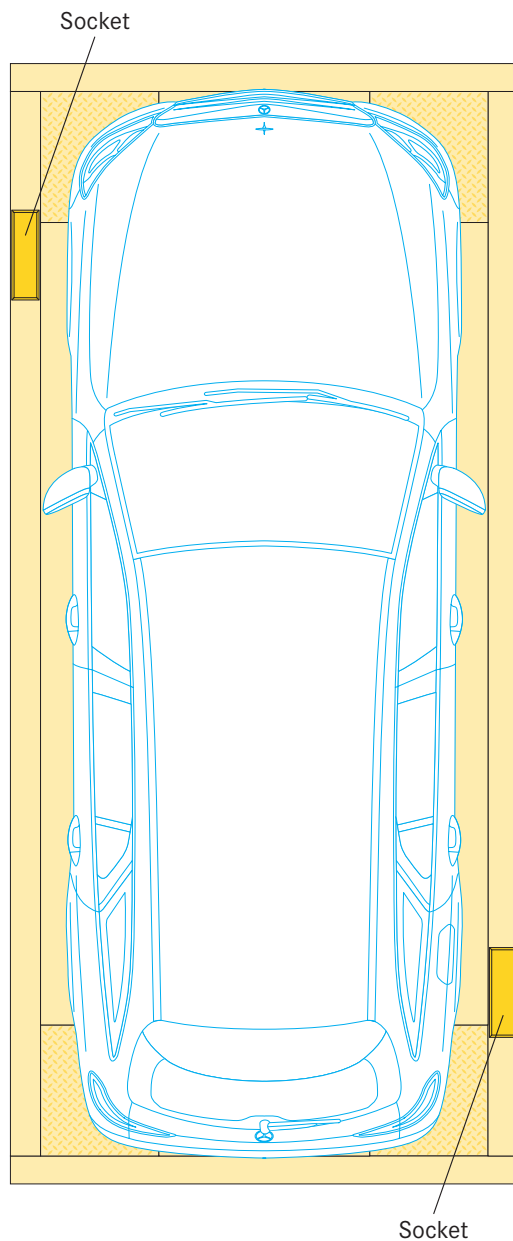

EV charging on the pallet

- Two sockets on the pallet
- In the transfer area, the user connects the electric vehicle to the pallet with the own charging cable
- Charging via CEE or type 2 socket for max. 22 kW with charging points provided by customer
- Pallets are automatically stored at the power-supplied parking places (charging bay) in the system
- As an option, rearrangement of the parking places. This means, that more electric vehicles can be charged than there are charging points available.

Services provided by customer

- Cable feed to the charging bays*
- Charging points (if required)
- Electric meter (if required)
- EV charging management (if required)

* compliant to local power supply regulations

Please note:

For EV charging WÖHR recommends using wider pallets, e.g. 240 to 250 cm wide. This changes the clear installation dimensions specified in the data sheets. Please consult with WÖHR.

We reserve the right to change design details, procedures and standards due to technical progress and environmental requirements.