

Otto Wöhr GmbH | Ölgrabenstr. 14 | 71292 Frielzheim


PRESSEMITTEILUNG

16. Januar 2017

Parklift 450 – The Latest Addition

The new Parklift 450 is designed to replace its predecessor, the Parklift 440. The advantages of this newly redeveloped system lie in the reduced installation dimensions, while the vehicle dimensions remain unchanged.

■ Parklift 450-200 (350)

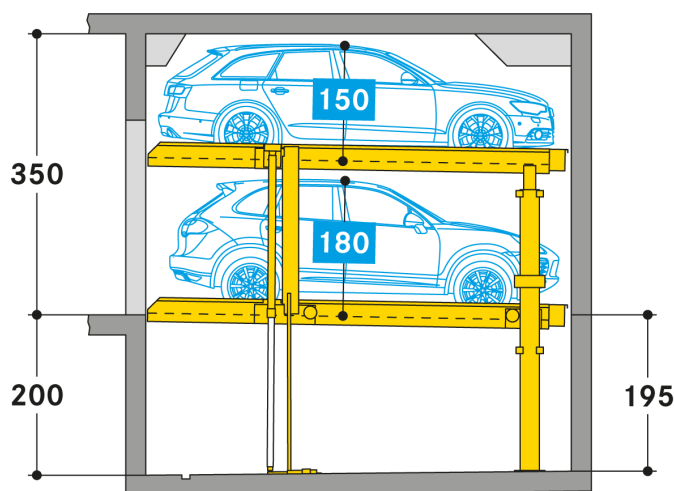

Parklift 450 with a pit depth of 200 cm and clear height above the entrance level of 350 cm, offer cars with a height of 150 cm and 180 cm comfortable parking places.

The new Parklift 450 system makes its launch on the market with some absolutely innovative advantages and a great deal to offer in terms of aesthetics.

The new Parklift 450 also offers maximised installation dimension flexibility. Here the trend is to shift away from the rigidly set, 15 cm clearance increments in as far as the pit-depths are concerned and to move toward increased clearance flexibility. In fact, the newly designed pit depths provide for 5 cm clearance increments.

Compared to predecessor models, the Parklift 450 furthermore features a clear ceiling height that is 5 cm less, without any reduction to the usual vehicle heights.

How does this come about?

The previous models feature an elevated platform for drainage of the water accumulating in the relative parking spaces, where the water drains down from the platform into drainage channels. The newly developed systems have done away with the elevation and have resolved the drainage issues by slightly sloping the platform giving it a minimal, 2% inclination.